6 head HiFi VCR

VR 627

TapeList

- *Turbo Drive with Tape Position Indicator*
- *Digital Studio Picture Control*
- *Turbo Timer with Net Name Detection*
- *Record Link*
- *Smart Picture*
- *Audio Stereo Cinch Outputs*
- *Front A/V*

Digital Silver

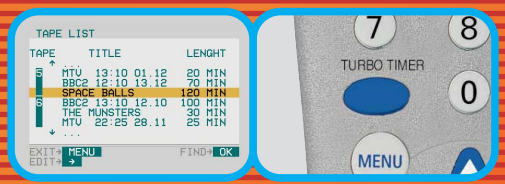

Let's make things better.

PHILIPS

6 head HiFi VCR

VR 627

Product information

Reception - Installation
- Tuner: *Hyperband, UHF, VHF*
- Tuning - presets: *PLL, CH entry, 99 presets*
- Tuning/Install Features: *Auto Tuning, Manual Store, Plug & Play, Welcome Screen*
- TV Related Functions: *16:9 (pin 8), Analogue Direct Record, Analogue Follow TV*
- Time/Date Download: *PDC (Time/Date), Text (Time)*
- Modulator Features: *Electr. On/Off switch, Manual Frequency Adjustent*
- Frequency Adj. Range: *Ch 21 - Ch 55*
- Preadj. modulation frequency: *591.25 MHz (Ch 36)*

User Interface
- OSD Menu Languages: *Czech, Danish, Dutch, English, Finnish, French, German, Hungarian, Italian, Norwegian, Polish, Portuguese, Russian Cyrillic, Slovak, Spanish, Swedish*
- Record Speed: *Long Play, Standard Play*
- Record Speed Selection: *Auto LP, Per Menu*
- Picture Improvement System: *Digital Studio Picture Control*
- Audio Recording Level: *Automatic*
- Archiving System: *Tape List*
- Special Features: *Auto Standby On/Off, Child Lock, Display On/Off*

On Tape Standard
- Additional Playback Standard: *BLACK & WHITE, NTSC Playback on PAL TV*

Remote Control Unit
- Remote Control - Type Number: *RT128/111*
- Remote Control - Codes: *VCR1, VCR2, TV-Multicode*

Connectors Rear
- EXT1: *Black, Euro CVBS in/out*
- EXT2: *Black, Euro Decoder, RGB loop through*
- Rear Audio Connector: *Cinch Stereo Out*
- Terrestrial Antenna In/Out: *75 Ohms (IECtype)*
- Mains Connector: *Standard (IECtype)*

Connectors Front
- Front A/V Connectors: *Cinch CVBS In, Cinch Stereo In*

Tape Deck
- Number of Video / FM Audio / Flying Erase Heads: *4 / 2 / 0*
- Play: *+1, -1, Repeat*
- Additional Playback Features: *Perfect Still, Multiple Search Speed, Multiple Slow Motion Speed*
- Index Related Functions: *Blank Tape Search, Next/Prev. index search*
- Head Cleaning Mode: *Automatic*
- Tape Length Recognition: *Automatic*
- Tape Counter: *Linear Relative (h.m.s), Time Left (h.m.), Tape Position Indicator*
- Winding / Rewinding Time (E180): *100 sec.*
- Automatic Functions at Tape End: *Rewind after Play, Eject after Record*

Programming
- Number of Events: *6/month*
- Record Control & Transmitter Identification: *Net-name detection, PDC, VPS*
- Programming System: *Showview, ShowView Mapping, Daily/Weekly, Programming by Net-Name*
- Special Timer Programming: *Turbo Timer*
- Record Link: *SCART 2*

General
- Voltage: *198-264 V*
- Frequency: *50Hz*
- Backup Presets: *1yr*
- Backup Clock - Calendar - Timer Event: *3hrs*
- Power Consumption Play / Std-By / Low Power Std-By in W: *16 / 4.4 / <4*
- Set Size - W x D x H in mm: *380 x 260 x 93*
- Packaging - W x D x H in mm: *450 x 382 x 180*
- Weight Including / Excluding package in kg: *5.5 / 3.6*
- Equipment Supplied: *Antenna, Mains cord, Batteries, SCART Cable*

Product Highlights

• *Tape List*
Philips' Tape List offers a convenient and easy to use tape content information system for your most frequently used tapes (up to 9). You can use any tape, even those with existing recordings. To browse through the content of your most frequently used tapes, simply press the Tape List button on the remote control. The complete tape content overview will be shown on the TV screen. And you have immediate access to any recording just by selecting the desired recording (from the information displayed on your TV screen). On top of that you can edit the titles whenever you want to.

• *Digital Studio Picture Control*
Digital Studio Picture Control keeps checking the quality of your videotapes and reproduces the best possible picture performance. Philips' Digital Studio Picture Control optimises the playback quality. It measures the characteristics of the tape, adapts the resolution and reduces the picture noise.

• *Turbo Timer with Net Name Detection*
Is Timer Programming complicated? No! Is Timer Programming time consuming? No! Just press the Turbo Timer button on the remote control, select the TV channel you want to record (directly by its name), set the start and the end time. That's it. All it takes is only a few seconds.

• *SMART Picture*
With this unique feature, you are now able to optimise the sharpness and colour, in playback, to your own preference.

• *Multibrand TV Remote Control*
Should we say it? Our remote-controls can communicate with more than 190 different brands of TVs.

	VR627/58	VR627/16	VR627/02
TV Systems Off Air	PAL B/G PAL D/K SECAM B/G SECAM D/K	PAL B/G	PAL B/G
Sound Systems	German Stereo, Mono, NICAM	German Stereo, Mono, NICAM	German Stereo, Mono
Modulator	Pal GK (switchable)	Pal G	Pal G
Record / Playback Standard	MESECAM, PAL	PAL	PAL

Subject to modification without notice

Show View and Video+ are registered Trademarks of Gemstar Development Cooperation.